



# SVGA Monitor Cable

## HD15 Male / HD15 Male, Black

**Reliable connections for superior signal quality.**

MANHATTAN® SVGA Cables easily connect a monitor with a desktop or notebook computer. Ideal for use with video splitters, KVM switches and any HD15-equipped display, computer or device, MANHATTAN SVGA Cables are engineered and constructed of quality materials to deliver dependable transmissions in video applications. Full foil and braided shielding, molded boots with strain relief and mini-coax (RGB) and paired video wire construction help provide maximum conductivity and clear, crisp images with reduced EMI interference and distortion over extended distances.

<b>Model</b>	<b>Length</b>
<b>311731</b>	1.8 m (6 ft.)
<b>311748</b>	3.0 m (10 ft.)
<b>312721</b>	4.5 m (15 ft.)
<b>372978</b>	7.5 m (25 ft.)
<b>312776</b>	10 m (33 ft.)
<b>313629</b>	15 m (50 ft.)
<b>335607</b>	20 m (66 ft.)
<b>337342</b>	30 m (100 ft.)

### Lifetime Warranty


Strict manufacturing standards ensure the highest quality in all MANHATTAN products. All items carry a full Lifetime Warranty — the strongest quality commitment anyone can make.

### Model

311731  
311748  
312721  
312776  
313629  
335607  
337342  
372978




REV.	DESCRIPTION	ENG.	APPROVAL
B			

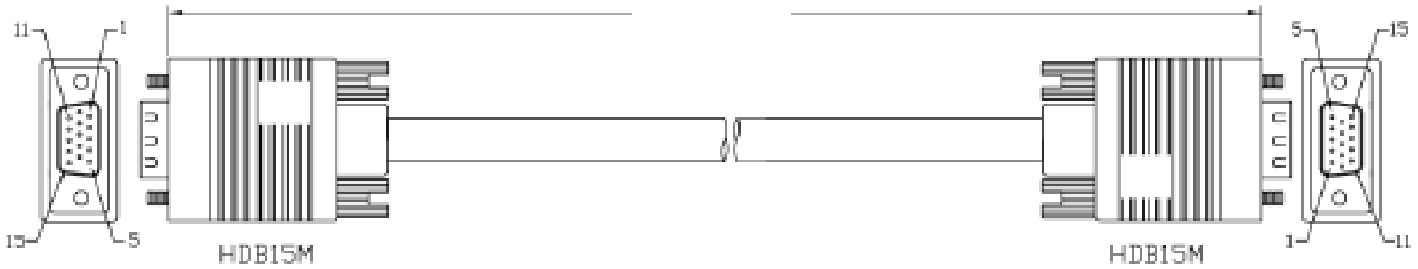

**NOTE:**

1. CABLE: 28AWG, UL2919, AL+B, 3COAXIAL+6C, BLACK COLOR, OD=8.0mm, PVC JACKET.
2. LENGTH: 1800mm
3. CONNECTOR: HDB15P\*2(FULL PIN, BLACK INSULATOR)
4. SCREW: R37.7 SCREW \*4

**5. CONTACTS:**



- 6 MOLD: SQUARE MOLDING.
- 7 OPEN/SHORT TEST: 100% TEST, INSULATIONS: 3M.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MANHATTAN AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF MANHATTAN.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCES: ±1°

TOLERANCES (MM)		TOLERANCES (IN)	
Ø	±0.07	Ø	±0.003
Ø.Ø	±0.07	Ø.Ø	±0.003
Ø.ØØ	±0.08	Ø.ØØ	±0.003
Ø.ØØØ	±0.07	Ø.ØØØ	±0.003



TITLE:	APPD:	
	Check:	XIE
CUSTOMER:	Drawn:	ZXW
	Unit:	mm
	Projection:	1st
	Scale:	1:1
	Sheet:	1 of 1
	REV:	A

## Features

- HD15 male to HD15 male
- Connects SVGA source to SVGA display
- Fully shielded to reduce EMI and other interference sources
- Molded PVC boot with strain relief
- Lifetime Warranty

## Specifications

### STANDARDS/CERTIFICATIONS

- UL 2919

### CONTACTS

- (2) 15-pin HD male connections
- Nickel plated
- Molded PVC boot
- Built-in strain relief
- Mini-coax (RGB) and paired video wire

### DIMENSIONS

- Overall diameter: 8.0 mm (0.31 in.)

### CABLE

- 28 AWG cable
- Withstanding voltage: 300 V DC
- Thermal plastic casing
- Foil and braided shielding

### PACKAGE CONTENTS

- SVGA Monitor Cable

For more information on MANHATTAN products, consult your local dealer or visit [www.manhattan-products.com](http://www.manhattan-products.com).



Copyright © MANHATTAN

