



# SVGA with Audio Cable

## HD15 and Stereo 3.5 mm Plug, Male to Male, Black

**Transmit sound and high-resolution video in a single-cable solution.**

MANHATTAN® provides a single-cable solution for connecting a desktop or notebook computer to a video display system with built-in speakers. From classrooms to conference rooms, it's the ideal solution for use with projectors, flat-panel displays, switches and other video devices with a stereo input. The single-cable configuration prevents tangles and clutter while limiting connectivity errors. The heavy foil and braided shielding with thermal casing helps ensure that audio and video signals are properly transmitted with less distortion for the best possible quality.

| Model         | Length         | Model         | Length        |
|---------------|----------------|---------------|---------------|
| <b>324311</b> | 4.5 m (15 ft.) | <b>326674</b> | 15 m (50 ft.) |
| <b>324342</b> | 7.5 m (25 ft.) | <b>326681</b> | 20 m (66 ft.) |
| <b>324359</b> | 10 m (33 ft.)  |               |               |


### Lifetime Warranty

Strict manufacturing standards ensure the highest quality in all MANHATTAN products. All items carry a full Lifetime Warranty — the strongest quality commitment anyone can make.

**Model**  
324311  
324342  
324359  
326674  
326681



| REV. | DESCRIPTION | ENG. | APPROVAL |
|------|-------------|------|----------|
|      |             |      |          |

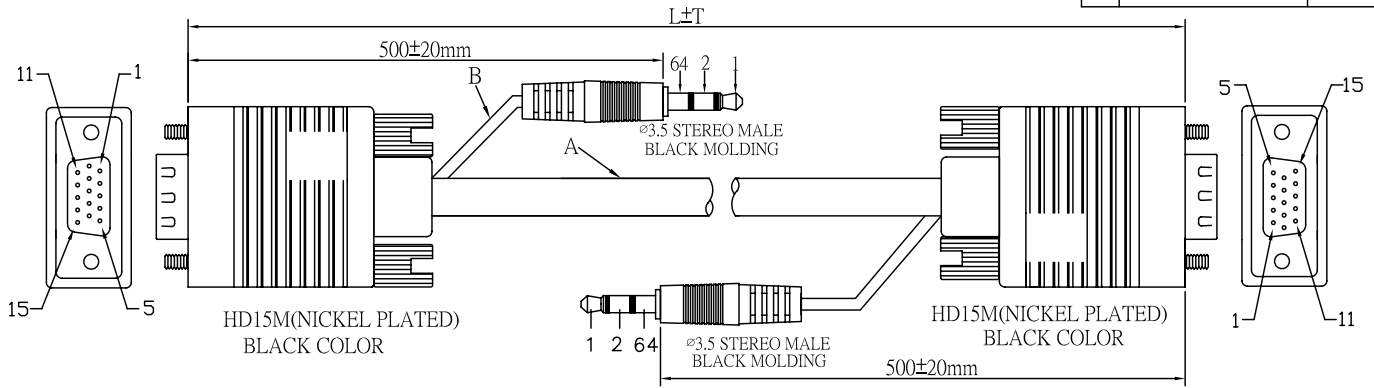

**NOTE:**

- CABLE: (A)UL2919,AL+B,30#\*3COAX+30#\*11C,OD=8.5mm,BLACK PLANE,PVC JACKET.(AM BRAID)  
(B)28#,UL2547,2C+S,OD=2.8mm,BLACK COLOR,PVC JACKET.
- LENGTH: L/500mm
- CONNECTOR: HDB15M\*2 (BLACK INASULATOR,FULL PIN) ,ø3.5 STEREO MALE\*2PCS.(NICKEL PLATED)
- SCREW:R37.7 SCREW\*4PCS.
- CONTACTS:

|       |      |     |     |     |     |     |   |   |   |    |    |    |    |    |    |       |
|-------|------|-----|-----|-----|-----|-----|---|---|---|----|----|----|----|----|----|-------|
| HD15M | 1    | 2   | 3   | 6   | 7   | 8   | 4 | 5 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 64    |
| HD15M | 1    | 2   | 3   | 6   | 7   | 8   | 4 | 5 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 64    |
|       | RED  | GRN | BLU | RED | GRN | BLU |   |   |   |    |    |    |    |    |    | BRAID |
|       | COAX |     |     | GND |     |     |   |   |   |    |    |    |    |    |    |       |

|      |   |   |    |
|------|---|---|----|
| ø3.5 | 1 | 2 | 64 |
| ø3.5 | 1 | 2 | 64 |

- OPEN/SHORT TEST: 100% TEST.  
INSULATIONS: 5M.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MANHATTAN AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF MANHATTAN.

UNLESS OTHERWISE SPECIFIED-DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE:±1°

| TOLERANCE (INCH) | TOLERANCE (MM) |
|------------------|----------------|
| x                | ±0.02"         |
| x.x              | ±0.01"         |
| x.xx             | ±0.008"        |
| x.xxx            | ±0.005"        |
| x                | ±0.5mm         |
| x.x              | ±0.20mm        |
| x.xx             | ±0.15mm        |
| x.xxx            | ±0.10mm        |



|               |        |      |            |            |
|---------------|--------|------|------------|------------|
| TITLE:        | APPD   |      |            |            |
| Check         |        | XIE  |            |            |
| CUSTOMER:     | Drawer | WJF  | Date       | 2009.10.29 |
| CUSTOMER P/N: | Unit   | mm   | Projection | ⊕          |
| ICT P/N:      | Scale  | 1:1  | Size       | A4         |
| DWG.NO:       | Sheet  | 1 of | REV.       | A          |

## Features

- Ideal single-cable solution for connecting a desktop or notebook computer to a monitor with built-in speakers
- HD15 male to HD15 male with built-in 3.5 mm stereo male to male
- Heavy-gauge cable with PVC protective jacket
- Fully shielded to reduce EMI interference for improved video transmission
- Molded PVC boot with strain relief
- Lifetime Warranty

## Specifications

### STANDARDS AND CERTIFICATIONS

- UL 2919
- UL 2547

### CONNECTORS

- (2) 3.5 mm stereo male connections
- (2) HD 15-pin male connections
- Nickel plated
- Molded PVC boot
- Built-in strain relief
- Mini-coax (RGB) and paired video wire
- 40.6 cm (16 in.) cable between video and audio connections

### CABLE

- 30 AWG conductors (video)
- 38 AWG conductors (audio)
- Withstanding voltage: 300 V DC
- Thermal plastic casing
- Shielding: foil and braided

### PACKAGE CONTENTS

- High Speed HDMI Cable

For more information on MANHATTAN products, consult your local dealer or visit [www.manhattan-products.com](http://www.manhattan-products.com).



Copyright © MANHATTAN

