



DisplayPort Monitor Cable

DisplayPort Male / DisplayPort Male, Black

High-definition performance for personal computing.

MANHATTAN® DisplayPort Cables provide a single-cable solution that delivers both high-definition digital audio and video signals between desktop and notebook computers and an output device. With 10.8 Gbps bandwidth (1080 Mbps), DeepColor and 24-bit, 8-channel uncompressed audio capability, the 20-pin connector is small, compact and ideal for use with DisplayPort-equipped computers, flat-panel displays, slim-profile devices and many consumer electronics including Blu-ray players and game consoles. Full foil and braided shielding, molded boots with strain relief, protective PVC jackets and gold-plated connections help MANHATTAN DisplayPort Cables provide maximum conductivity and clear, crisp signal transmissions with reduced EMI interference and distortion.

Model	Length
306935	1 m (3.3 ft.)
307116	2 m (6.6 ft.)
391931	2 m (6.6 ft.)
307093	3 m (10 ft.)


Lifetime Warranty

Strict manufacturing standards ensure the highest quality in all MANHATTAN products. All items carry a full Lifetime Warranty — the strongest quality commitment anyone can make.

Model
306935
307093
307116
391931



REV.	DESCRIPTION	ENG.	APPROVAL

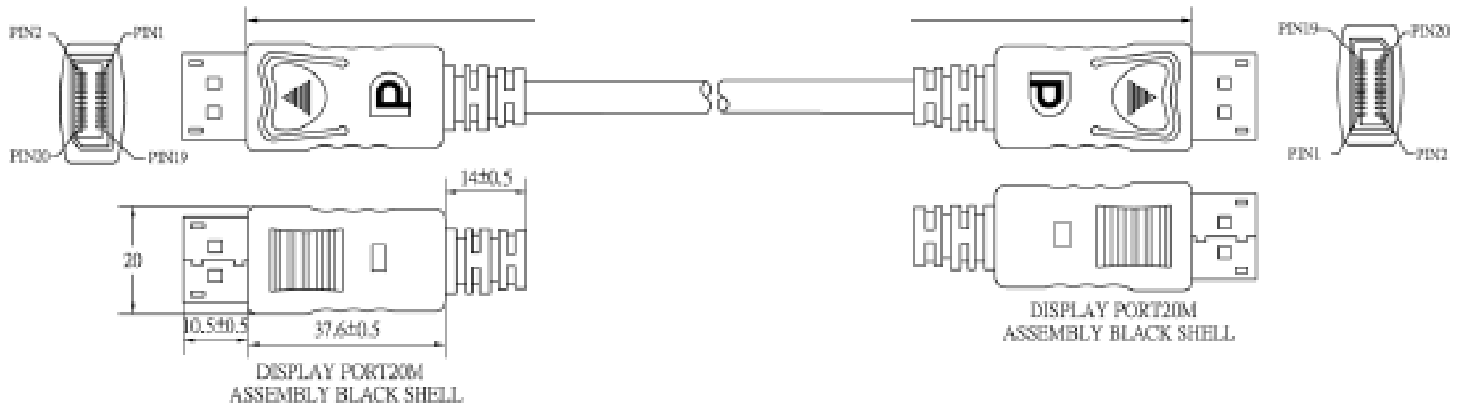

NOTE:

1. CABLE:UL20276,(28#*1P+1+AL)*5Pair+28#*4C+AL+B,OD=6.8mm,BLACK COLOR,PVC JACKET. (AM BRAID)
2. LENGTH:2000mm
3. CONNECTOR:DISPLAY PORT20M *2PCS.
4. MOLD:ASSEMBLY BLACK SHELL
5. CONTACTS:

DISPLAY PORT20M	1	3	2	4	6	5	7	9	8	10	12	11	13	14	15	17	16	18	19	64
DISPLAY PORT20M	12	10	11	9	7	8	6	4	5	3	1	2	13	14	15	17	16	18	19	64
	TP		GND		TP		GND		TP		GND		TP		GND		TP		GND	

6. OPEN/SHORT TEST:100% TEST.
INSULATION: 5M.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MANHATTAN AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF MANHATTAN.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE:±0°

TOLERANCE (mm)	TOLERANCE (mm)
0 - 40.00"	± 0.5mm
40.00" - 100.00"	± 0.75mm
100.00" - 150.00"	± 1.0mm
150.00" - 200.00"	± 1.5mm



TITLE:	APPROD:			
	Check:	XIE		
CUSTOMER:	Drawer:	WJE	Date:	
CUSTOMER P/N:		Unit:	mm	Projection:
KT P/N:		Scale:	1:1	Size:
DWG. NO:		Sheet:	1 of	REV.:

Features

- DisplayPort 20-pin male to DisplayPort 20-pin male latching connections
- Delivers high-bandwidth, digital audio/visual signals from PC to display and other DisplayPort-enabled devices – up to 1080p resolution
- Supports HDMI and DVI signal pass-through
- Fully shielded to reduce EMI and other interference sources
- Plug and Play for box-to-box applications
- Molded PVC boot
- Lifetime Warranty

Specifications

STANDARDS AND CERTIFICATIONS

- UL 20276
- DisplayPort v1.1

CONNECTORS

- (2) DisplayPort 20-pin male with latches
- Nickel plated
- Molded PVC boot

CABLE

- 28 AWG connectors
- Shielding: aluminum and Mylar braid
- Withstanding voltage: 300 V DC
- Insulation resistance: 5 MOhms
- Contact resistance: 10 Ohms
- PVC jacket

PACKAGE CONTENTS

- DisplayPort Monitor Cable

For more information on MANHATTAN products, consult your local dealer or visit www.manhattan-products.com.



Copyright © MANHATTAN

